



Series 9000


Vinyl Single Hung

Contents





























































List of Architectural Drawings	9000SH - 3
Elevations - Single Hung	9000SH - 4
Available Sizes - Single Hung	9000SH - 5
Elevations - Double Single Hung	9000SH - 6
Available Sizes - Double Single Hung	9000SH - 7
Series 9000 Single Hung specification	9000SH - 9
Series 9000SH Test Data: AAMA Structural Performance	9000SH - 13
Series 9000SH Test Data: NFRC Thermal Performance	9000SH - 13
Architectural Drawings	9000SH - 14


List of Architectural Drawings

Single hung, vertical section (9000SH_1.dwg)	9000SH - 14
Single hung, vertical detail (9000SH_1d.dwg)	9000SH - 15
Single hung, passive air vent, vertical section (9000SH_2.dwg)	9000SH - 16
Single hung, passive air vent, vertical detail (9000SH_2d.dwg)	9000SH - 17
Single hung, horizontal section (9000SH_3.dwg)	9000SH - 18
Single hung, horizontal detail (9000SH_3d.dwg)	9000SH - 19
Single hung t-bar to single hung, horizontal section (9000SH_4.dwg)	9000SH - 20
Single hung t-bar to single hung, horizontal detail, vent (9000SH_4d.dwg)	9000SH - 21
Single hung, flush fin, vertical section (9000SH_1f.dwg)	9000SH - 22
Single hung, flush fin, vertical detail (9000SH_1fd.dwg)	9000SH - 23
Single hung, flush fin, horizontal section (9000SH_3f.dwg)	9000SH - 24
Single hung, flush fin, horizontal detail (9000SH_3fd.dwg)	9000SH - 25



Elevations - Single Hung

 18 X 24	 24 X 24	 30 X 24	 36 X 24	 42 X 24	 48 X 24
 18 X 30	 24 X 30	 30 X 30	 36 X 30	 42 X 30	 48 X 30
 18 X 36	 24 X 36	 30 X 36	 36 X 36	 42 X 36	 48 X 36
 18 X 42	 24 X 42	 30 X 42	 36 X 42	 42 X 42	 48 X 42
 18 X 48	 24 X 48	 30 X 48	 36 X 48	 42 X 48	 48 X 48
 18 X 54	 24 X 54	 30 X 54	 36 X 54	 42 X 54	 48 X 54
 18 X 60	 24 X 60	 30 X 60	 36 X 60	 42 X 60	 48 X 60
 18 X 66	 24 X 66	 30 X 66	 36 X 66	 42 X 66	 48 X 66
 18 X 72	 24 X 72	 30 X 72	 36 X 72	 42 X 72	 48 X 72
 18 X 84	 24 X 84	 30 X 84	 36 X 84	 42 X 84	 48 X 84




Available Sizes - Single Hung























































Local: (509) 248-4462 U.S., Alaska, Hawaii: (800) 322-8050 FAX: (509) 453-6143						Single Hung Vinyl Windows	
	Rough Opening Width						
Rough Opening Height		18	24	30	36	42	48
	24	18 x 24	24 x 24	30 x 24	36 x 24	42 x 24	48 x 24
	30	18 x 30	24 x 30	30 x 30	36 x 30	42 x 30	48 x 30
	36	18 x 36	24 x 36	30 x 36	36 x 36	42 x 36	48 x 36
	42	18 x 42	24 x 42	30 x 42	36 x 42	42 x 42	48 x 42
	48	18 x 48	24 x 48	30 x 48	36 x 48	42 x 48	48 x 48
	54	18 x 54	24 x 54	30 x 54	36 x 54	42 x 54	48 x 54
	60	18 x 60	24 x 60	30 x 60	<36 x 60	<42 x 60	<48 x 60
	66	18 x 66	24 x 66	30 x 66	<36 x 66	<42 x 66	<48 x 66
	72	18 x 72	24 x 72	<30 x 72	<36 x 72	<42 x 72	<48 x 72
	78	18 x 78	24 x 78	*<30 x 78	*<36 x 78	*<42 x 78	*<48 x 78
	84	18 x 84	24 x 84	*<30 x 84	*<36 x 84	*<42 x 84	*<48 x 84


1.< denotes egress windows.

2. *Available with maximum 36" high vent. Maximum fixed lite available is 48" x 48" or 16 square feet.



Elevations - Double Single Hung

 36 X 24	 48 X 24	 60 X 24	 72 X 24	 84 X 24	 96 X 24
 36 X 30	 48 X 30	 60 X 30	 72 X 30	 84 X 30	 96 X 30
 36 X 36	 48 X 36	 60 X 36	 72 X 36	 84 X 36	 96 X 36
 36 X 42	 48 X 42	 60 X 42	 72 X 42	 84 X 42	 96 X 42
 36 X 48	 48 X 48	 60 X 48	 72 X 48	 84 X 48	 96 X 48
 36 X 54	 48 X 54	 60 X 54	 72 X 54	 84 X 54	 96 X 54
 36 X 60	 48 X 60	 60 X 60	 72 X 60	 84 X 60	 96 X 60
 36 X 66	 48 X 66	 60 X 66	 72 X 66	 84 X 66	 96 X 66
 36 X 72	 48 X 72	 60 X 72	 72 X 72	 84 X 72	 96 X 72



Available Sizes - Double Single Hung

Local: (509) 248-4462 U.S., Alaska, Hawaii: (800) 322-8050 FAX: (509) 453-6143					Double Single Hung T-barred Combination Windows		
	Rough Opening Width						
Rough Opening Height		36	48	60	72	84	96
	24	36 x 24	48 x 24	60 x 24	72 x 24	84 x 24	96 x 24
	30	36 x 30	48 x 30	60 x 30	72 x 30	84 x 30	96 x 30
	36	36 x 36	48 x 36	60 x 36	72 x 36	84 x 36	96 x 36
	42	36 x 42	48 x 42	60 x 42	72 x 42	84 x 42	96 x 42
	48	36 x 48	48 x 48	60 x 48	72 x 48	84 x 48	96 x 48
	54	36 x 54	48 x 54	60 x 54	72 x 54	84 x 54	96 x 54
	60	36 x 60	48 x 60	60 x 60	<72 x 60	<84 x 60	<96 x 60
	66	36 x 66	48 x 66	60 x 66	<72 x 66	<84 x 66	<96 x 66
	72	36 x 72	48 x 72	<60 x 72	<72 x 72	<84 x 72	<96 x 72

1.< denotes egress windows.

I. GENERAL REQUIREMENTS

- A. Provide **Series 9000 Single Hung** windows where shown on the drawings, according to the following specifications.
- B. Work Included:
 - 1. Shop fabricated rigid polyvinyl chloride (PVC) windows.
 - 2. Shop glazing.
 - 3. Operating hardware and weatherstripping, and screens.
- C. Quality Assurance:
 - 1. Manufacturer must have been in production of vinyl windows for at least five years.
 - 2. Products must be individually labeled with NFRC Thermal Certification, and AAMA Structural Certification labels, indicating the specified performance level.
 - 3. All extrusions used must be listed in the AAMA Certified PVC Extrusions Directory for conformance to AAMA 109 procedures.
 - 4. Windows must be installed plumb and true into prepared openings in accordance with approved shop drawings or the latest version of AAMA 2400 or ASTM E2112.
- D. Delivery, Storage, and Handling:
 - 1. Deliver windows to jobsite.
 - 2. Identify each window with series type, U-factor, and work order number.
 - 3. Store off ground, on a flat surface in a near vertical position, under cover and protected from weather.
- E. Warranty:
 - 1. Residential - Limited lifetime warranty coverage shall be provided for as long as the original owner owns the home. Warranty coverage shall include defects in materials and/or workmanship in vinyl material products manufactured by Prime Window Systems, Yakima, Washington.
 - 2. Multi-Family - If Prime Window Systems products are installed in non-owner multi-family occupied dwellings then this warranty is limited to 10-Years on parts and 1 year on labor from the date of delivery.
 - 3. Commercial - Limited warranty coverage shall be extended for a 2 year period on commercial applications, excluding parts and labor.
 - 4. Terms of the warranty, limitations, and conditions of the warranty coverage shall be available by contacting Prime Window Systems.

Series 9000 Single Hung Specification

F. System Performance: AAMA/WDMA/CSA 101/I.S. 2/A440-05 Performance Class H-LC35 (48 x 96); AAMA/WDMA/CSA 101/I.S. 2/A440-08 Performance Class LC-PG35 (48 x 96)-Type H.

1. Air Infiltration : Not to exceed 0.1 CFM at 1.57 PSF in accordance with ASTM E283. *note 1
2. Water Resistance : No leakage when subjected to 6.75 PSF for four, five minute cycles per ASTM E547.
3. Structural : No damage after structural loading of 52.5 PSF per ASTM E330.
4. Thermal : U-value not to exceed 0. *note 2 when tested in accordance with NFRC 100-2010 procedures. Each unit shall bear a NFRC certification label.

II. PRODUCTS

A. **Series 9000 Single Hung Windows** as manufactured by:
Prime Window Systems, 3400 Tacoma Street, Union Gap, WA 98903
1-800-322-8050

B. Materials:

1. Frames, sash, mullions, and snap-in dry glazing bead members: High impact rigid polyvinyl chloride (PVC), compounded specifically for windows and doors. Material must meet ASTM Standard D 4726 and shall be lead-free. Frame width shall be 3 1/4" minimum with an integrally extruded nailing flange. Equalized daylight between fixed and operating lites shall be standard on all sliding windows. Fixed and vent interlocks must be reinforced with 18 ga. roll-formed galvanized steel.
2. Available colors: standard colors are white, almond(beige) and adobe; premium exterior color is dark brown exterior with white interior.
3. Hardware: Operating sash shall be counter-balanced by block and tackle balances of sufficient strength to hold the sash in any open position. Die cast cam action lock mechanism shall engage die cast metal keeper.
4. Fasteners: Stainless steel, or corrosion resistant finish.
5. Weatherstrips: Factory installed fin-pile weatherstrip to provide the proper fit and compression to effectively seal against the intrusion of air, water, and dust.
6. Insulating glass: Hermetically sealed units, 3/4" overall thickness. Glazing shall be a minimum of float quality and of adequate strength for the size and use intended.

Series 9000 Single Hung Specification

7. Screens: Charcoal fiberglass 18x16 mesh screen cloth set in painted roll formed aluminum frame fitted to the window with the necessary hardware.

C. Fabrication & Construction:

1. Windows must be constructed in a neat and workmanlike manner. All frame and sash corner joints shall be miter cut and fusion welded. Welds are to be dressed and finished to match the surrounding surfaces.
2. PVC window members shall have an integral white, almond or adobe color throughout the profile. Exposed surfaces shall be smooth and uniform in appearance.
3. Brown exterior finish (when specified) shall utilize solar reflective acrylic/polyurethane coatings. To prevent deformation and separation, solid brown extrusions and multi-layer co-extrusions will not be allowed.
4. An internal drainage shall be incorporated into both fixed lite and operating sash windows.
5. Glass units shall be held in place by an AAMA approved internal glazing tape and an externally mounted glazing bead. Glazing tape positioned on the exterior glazing surfaces shall not be permitted. Glass units must be supported by load-bearing setting blocks.

CI. Installation:

1. Windows shall be installed by experienced workmen in accordance with architect's instructions and architect's drawings.
2. Proper window installation methods are the responsibility of the architect and/or builder. Recommended installation methods are not the responsibility of Prime Window Systems, Yakima, Washington. Please refer to the latest version of AAMA 2400 or ASTM E2112 for installation procedures.

CII. Cleaning

1. All vinyl and glass must be cleaned inside and out. Temporary labels shall be removed, leaving the NFRC and AAMA labels for final inspection. Under no circumstances should solvents be used for cleaning.

END OF SECTION

(See Architect's notes on next page)

Series 9000 Single Hung Specification

ARCHITECT'S NOTES:

Note 1: Product surpasses AAMA requirement of 0.3 cfm per square foot.

Note 2: To specify a U-factor, select from the chart below. A complete chart of NFRC tested U-factors is found in the test data section.



NFRC CERTIFIED U - FACTORS

<i>3/4" O.A. glazing</i>	<i>Low E Glass* and Argon</i>	<i>U-factor = 0.29</i>
--------------------------	-------------------------------	------------------------

<i>1 1/8" O.A. glazing</i>	<i>Triple pane, Low E* and Argon</i>	<i>U-factor = 0.20</i>
----------------------------	--------------------------------------	------------------------

** Standard - Cardinal LoE²-272 (.04 emissivity)*

EXTERIOR

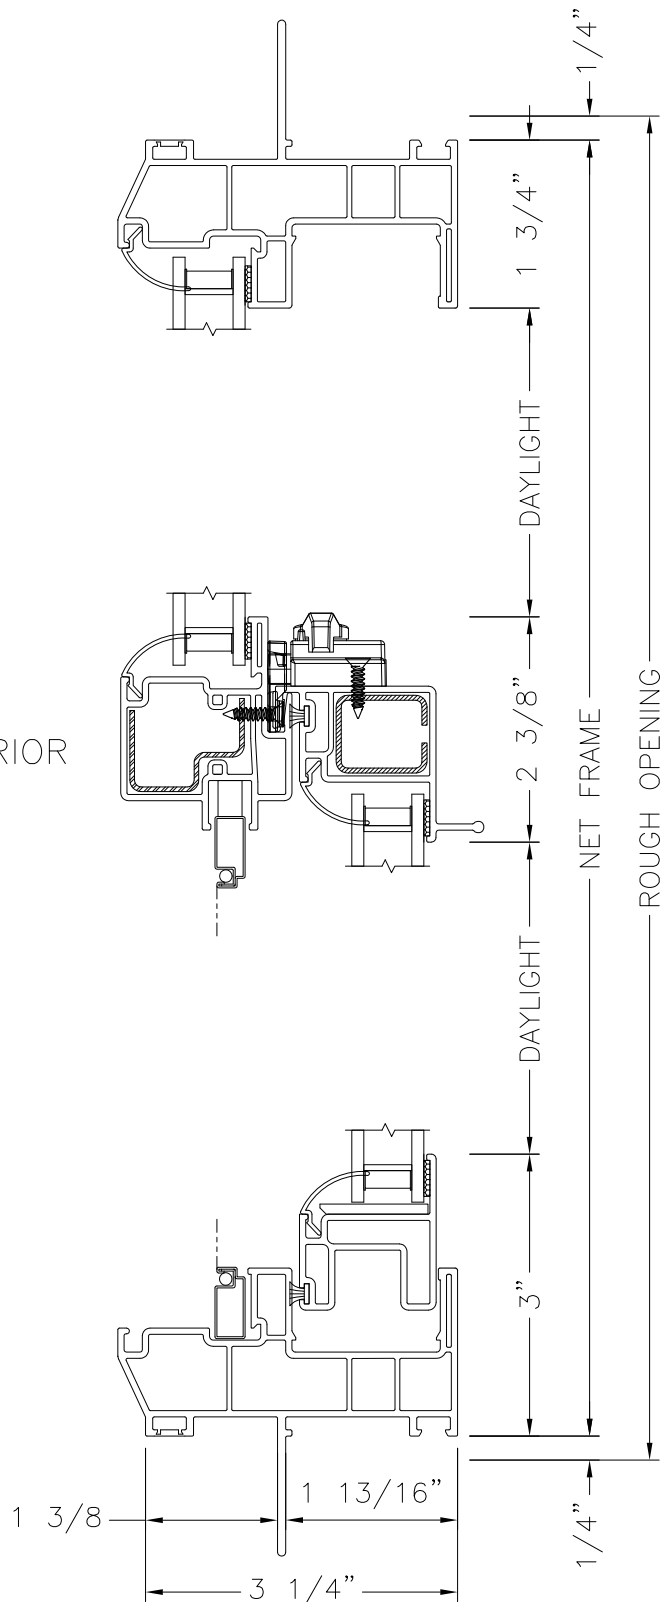


NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung
Vertical Section
Scale: 1/2 Scale



Drawing name: 9000SH_1.dwg
Date: 3/23/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

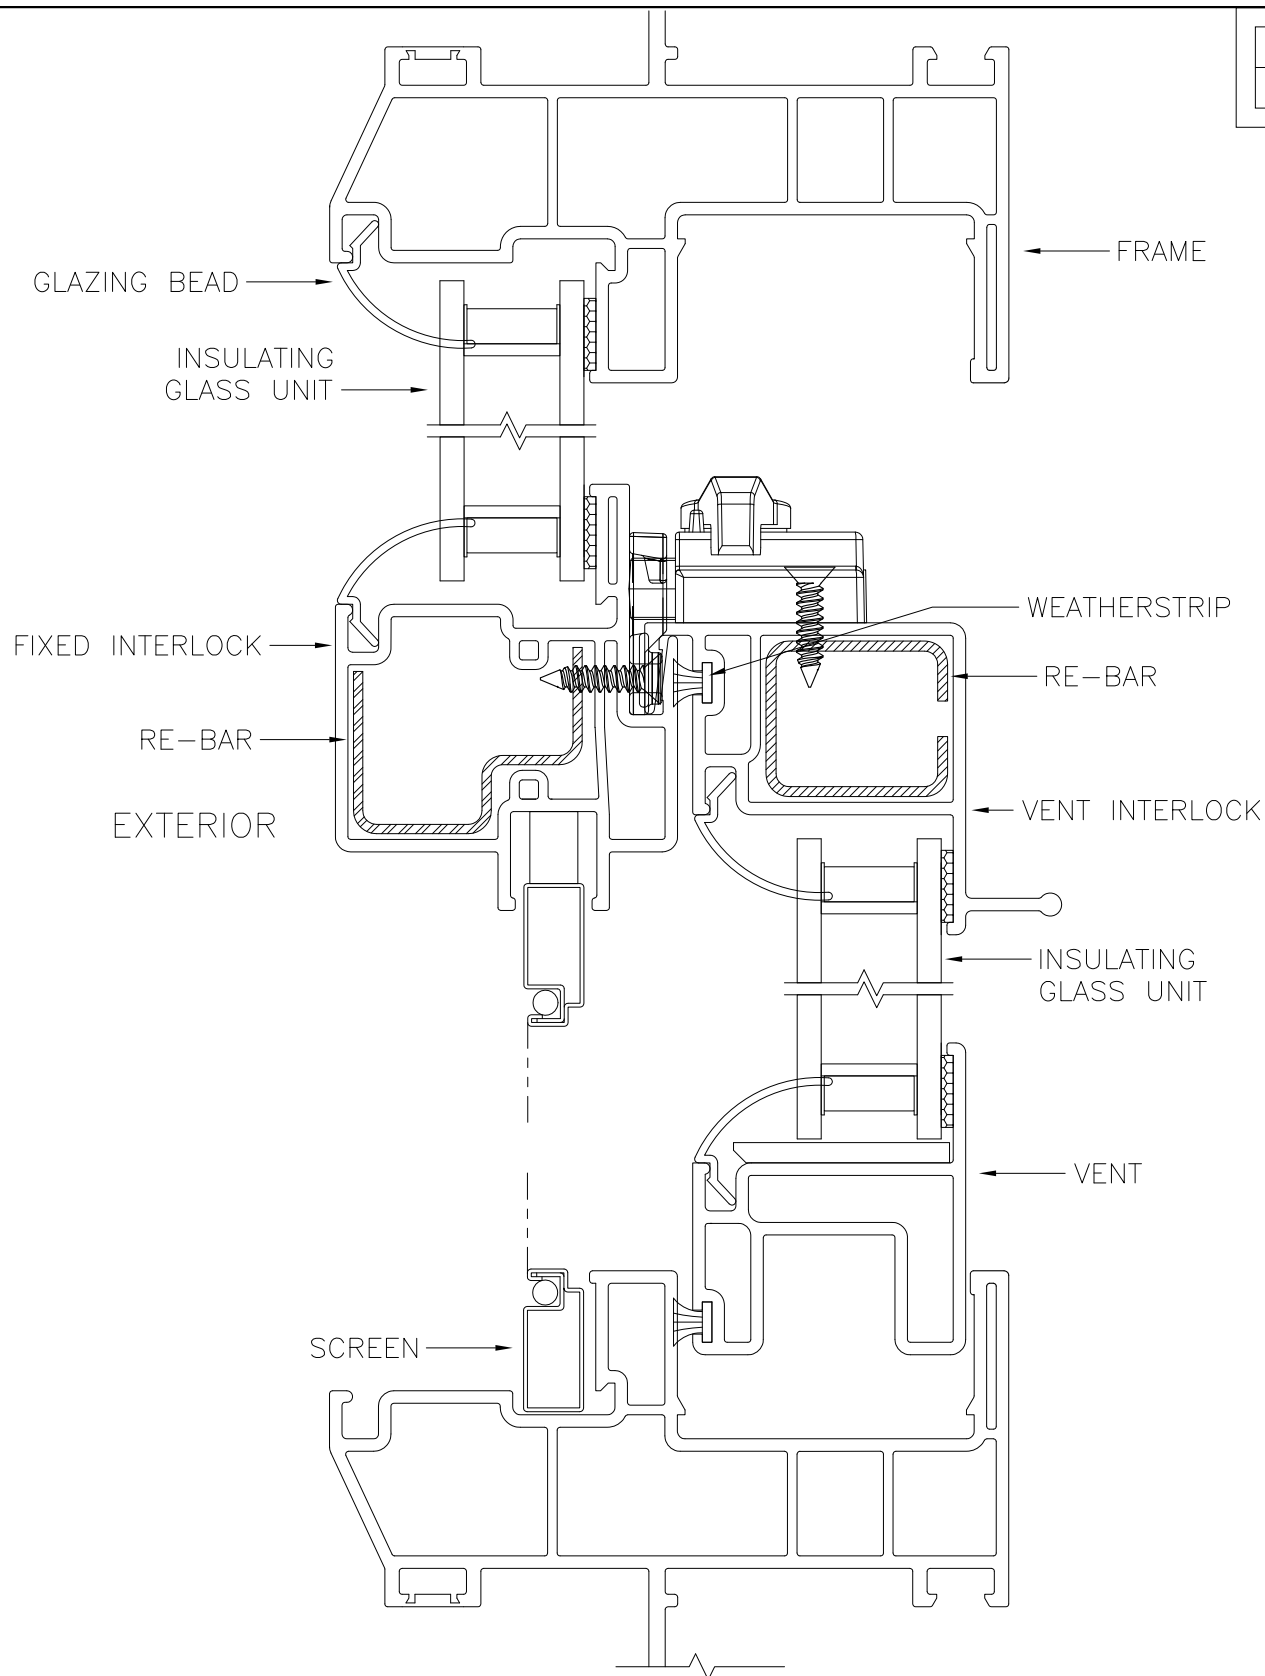

NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS



9000 Series, Single Hung
Vertical Detail
Scale: Full Scale



Drawing name: 9000SH_1d.dwg
Date: 3/23/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

EXTERIOR

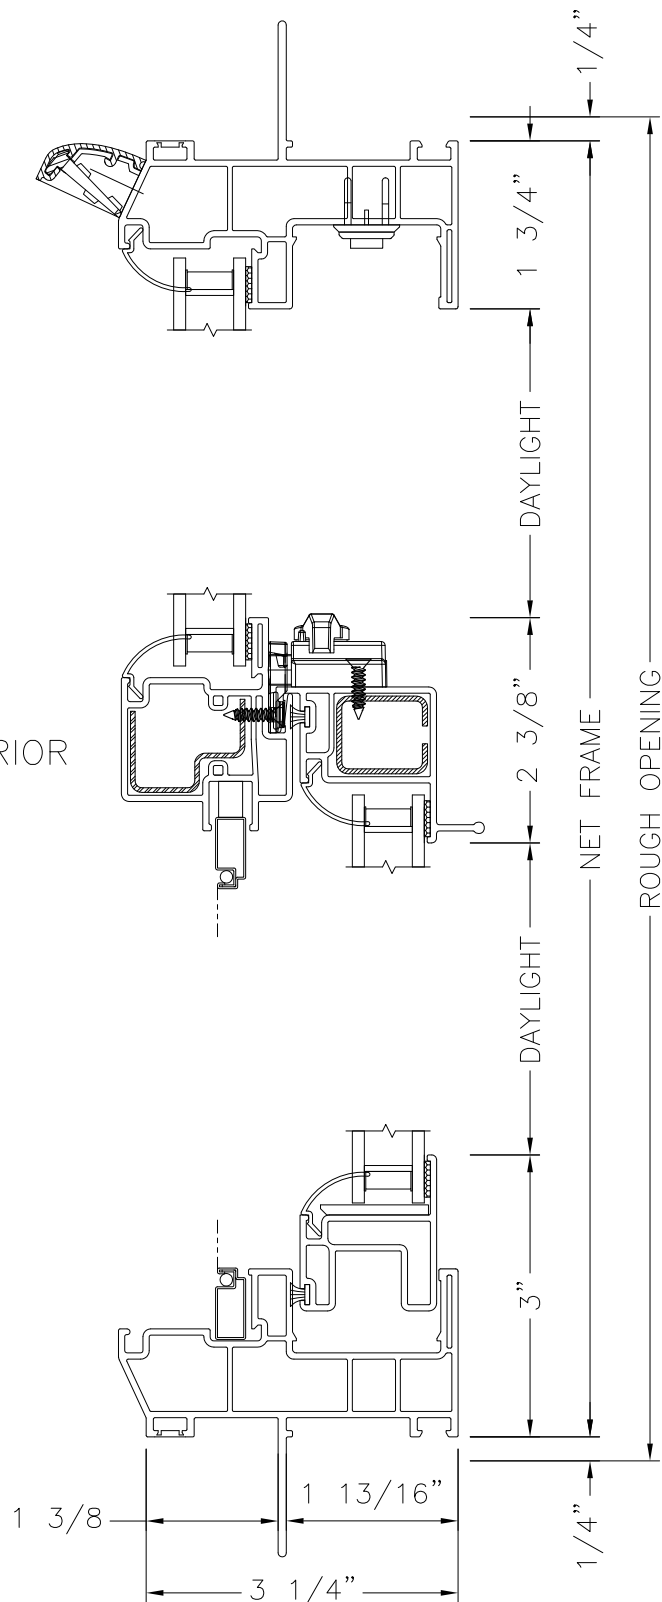


NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung
Vertical Section - Air Vent in frame
Scale: 1/2 Scale



Drawing name: 9000SH_2.dwg
Date: 6/1/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

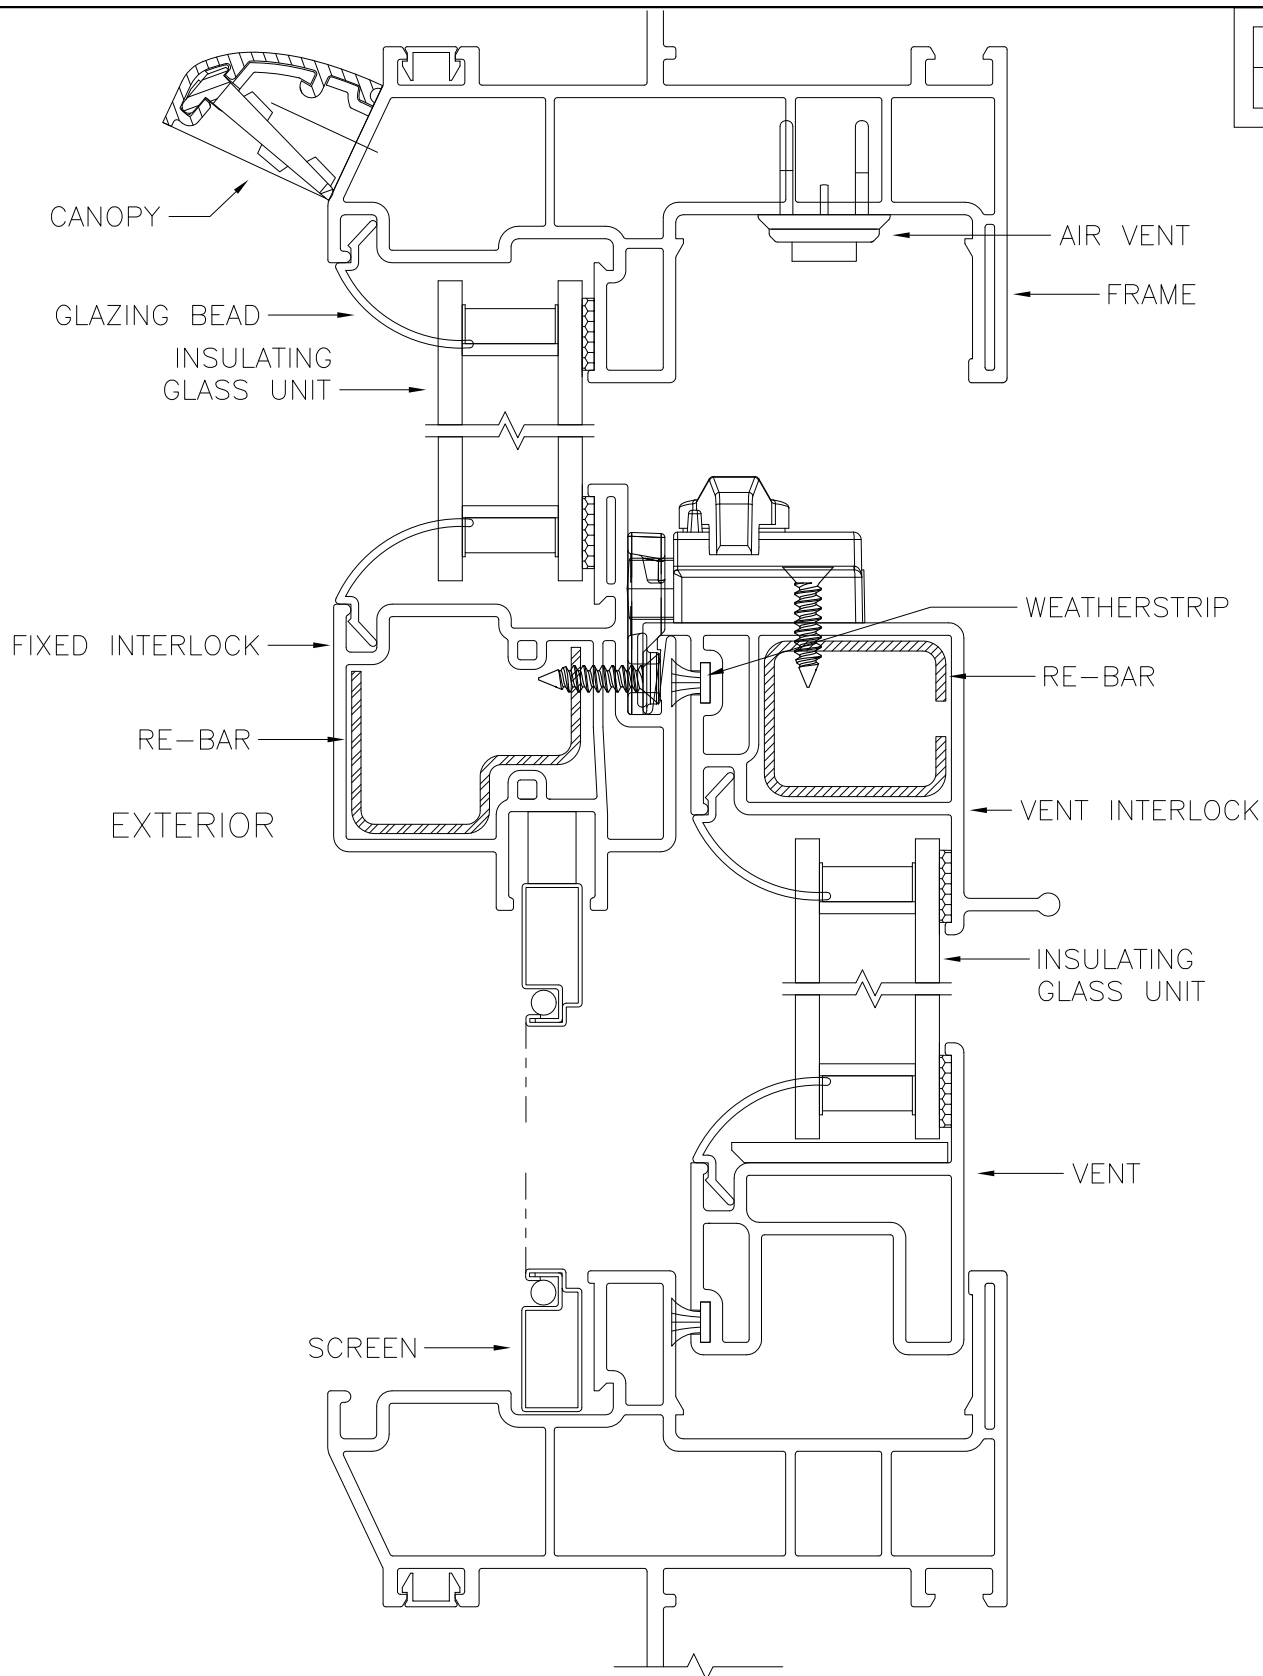


NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung
Vertical Detail - Air Vent in frame
Scale: Full Scale




Drawing name: 9000SH_2d.dwg
Date: 6/1/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.



EXTERIOR

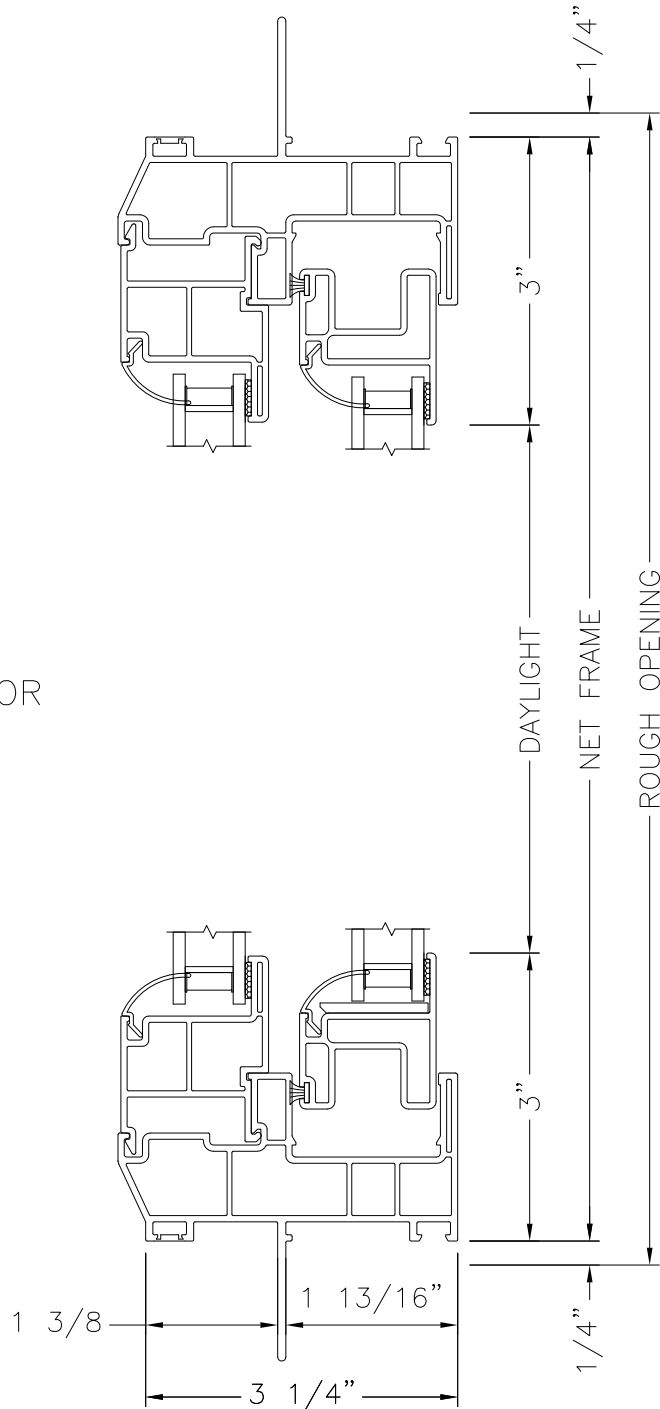

NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung
Horizontal Section
Scale: 1/2 Scale



Drawing name: 9000SH_3.dwg
Date: 3/23/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

EXTERIOR

GLAZING BEAD

FILLER
BAR


FRAME

VENT

INSULATING
GLASS UNIT

GLAZING TAPE

WEATHERSTRIP



NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS



9000 Series, Single Hung
Horizontal Detail
Scale: Full Scale



Drawing name: 9000SH_3d.dwg
Date: 3/23/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

EXTERIOR

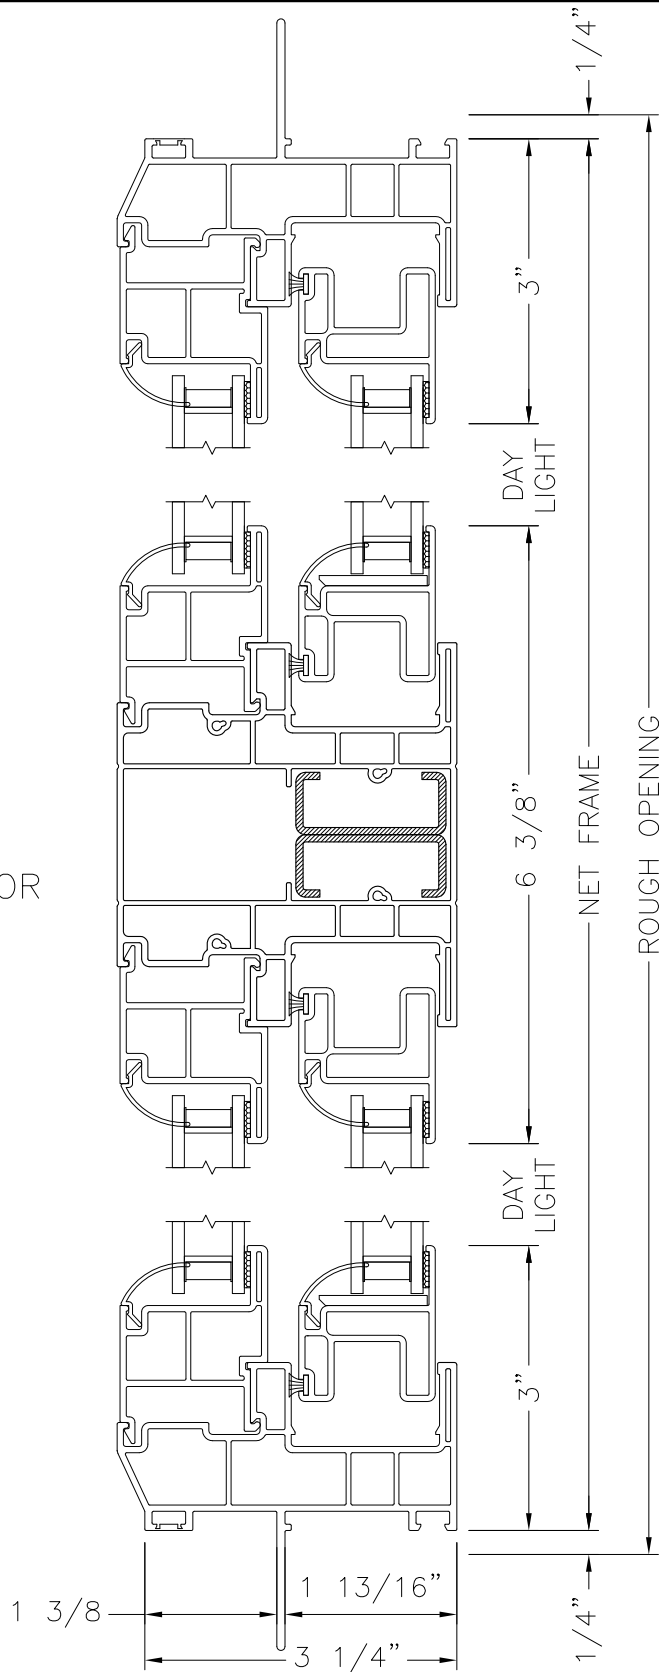



NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung
Horizontal Section, Integral Mullion
Scale: 1/2 Scale



Drawing name: 9000SH_4.dwg
Date: 7/3/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

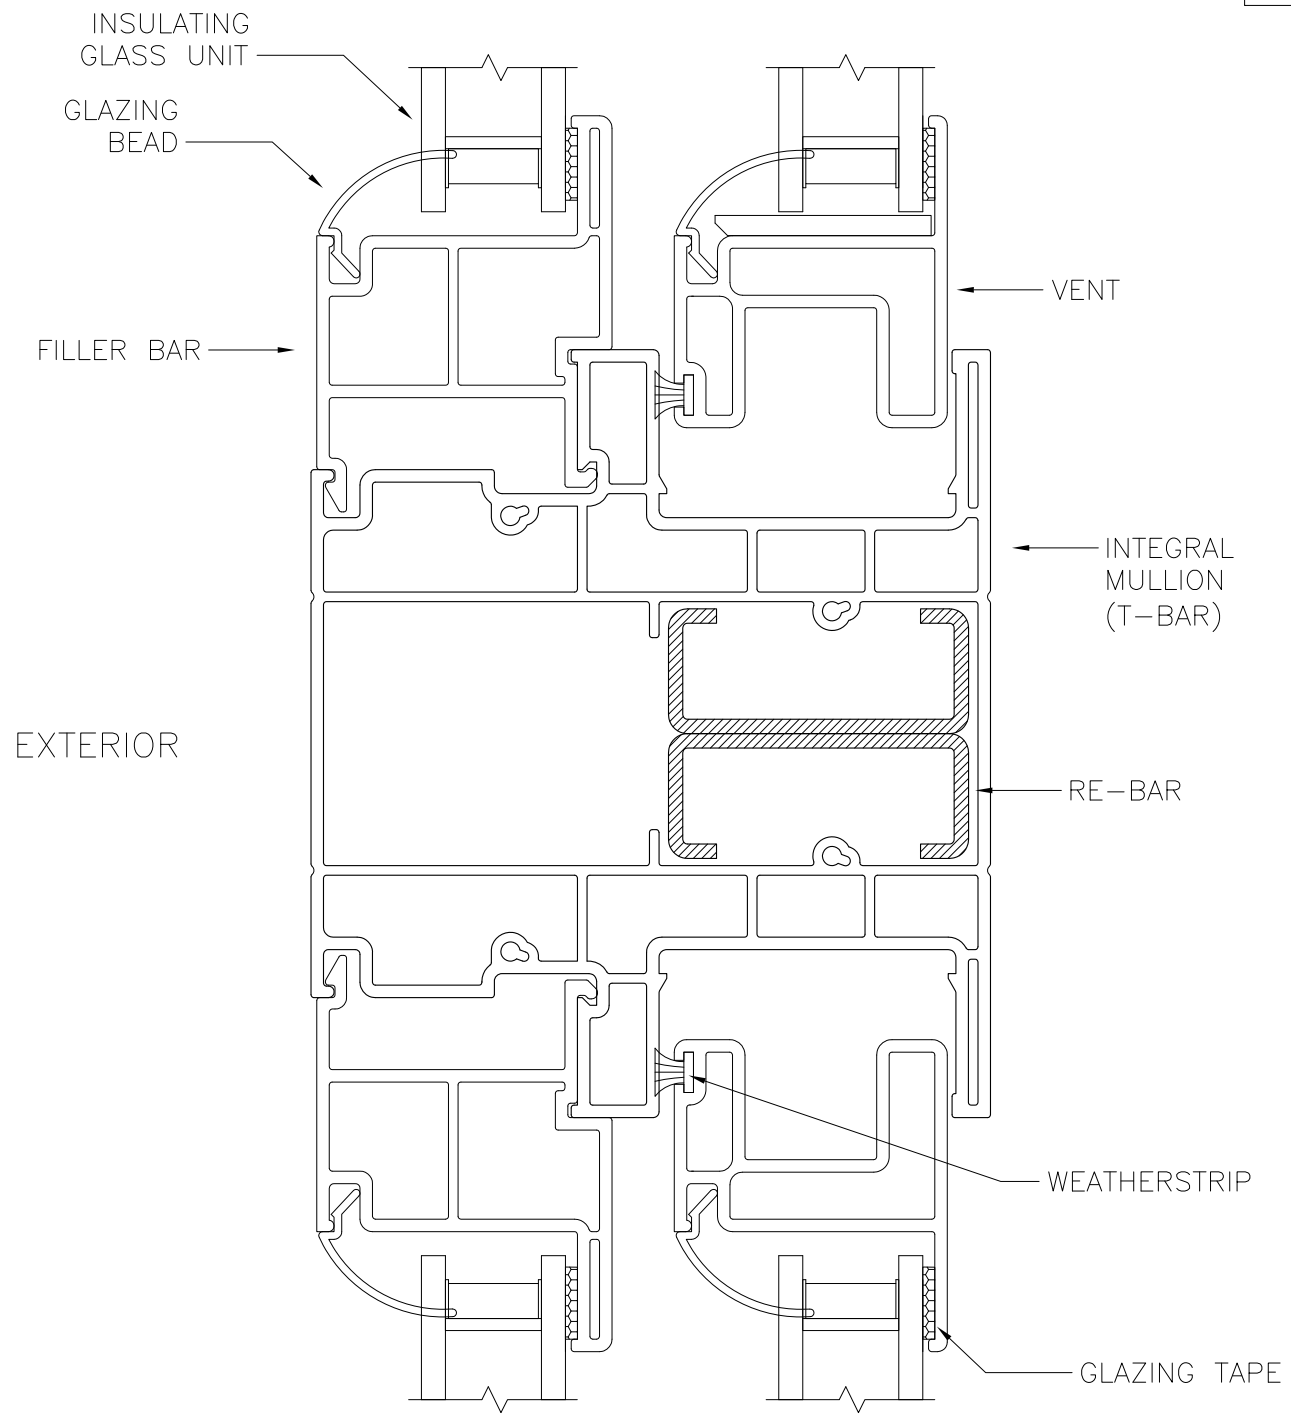



NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung
Horizontal Detail, Integral Mullion
Scale: Full Scale



Drawing name: 9000SH_4d.dwg
Date: 5/15/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

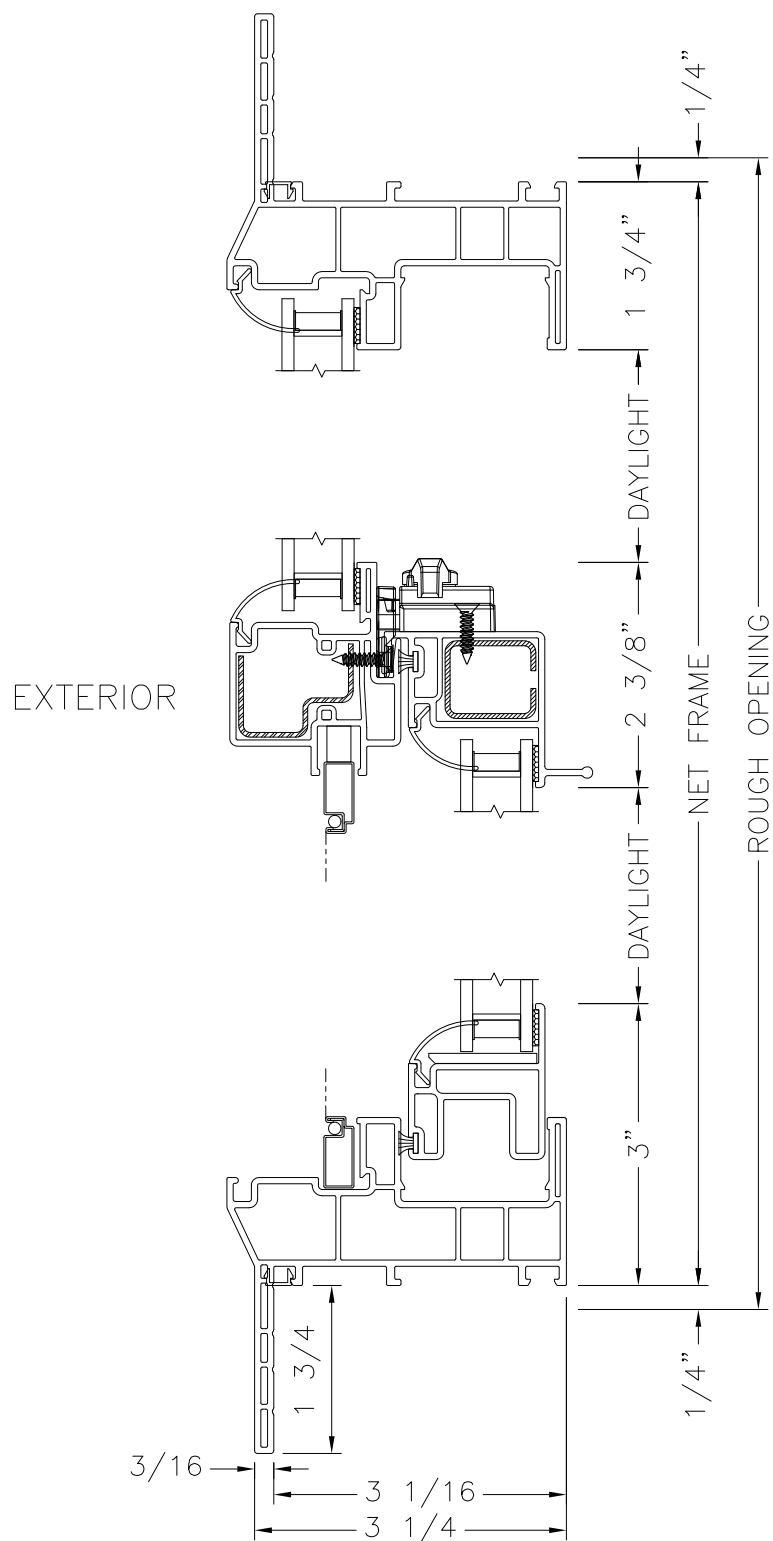


NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung, Flush Fin
Vertical Section
Scale: 1/2 Scale



Drawing name: 9000SH_1f.dwg
Date: 3/23/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

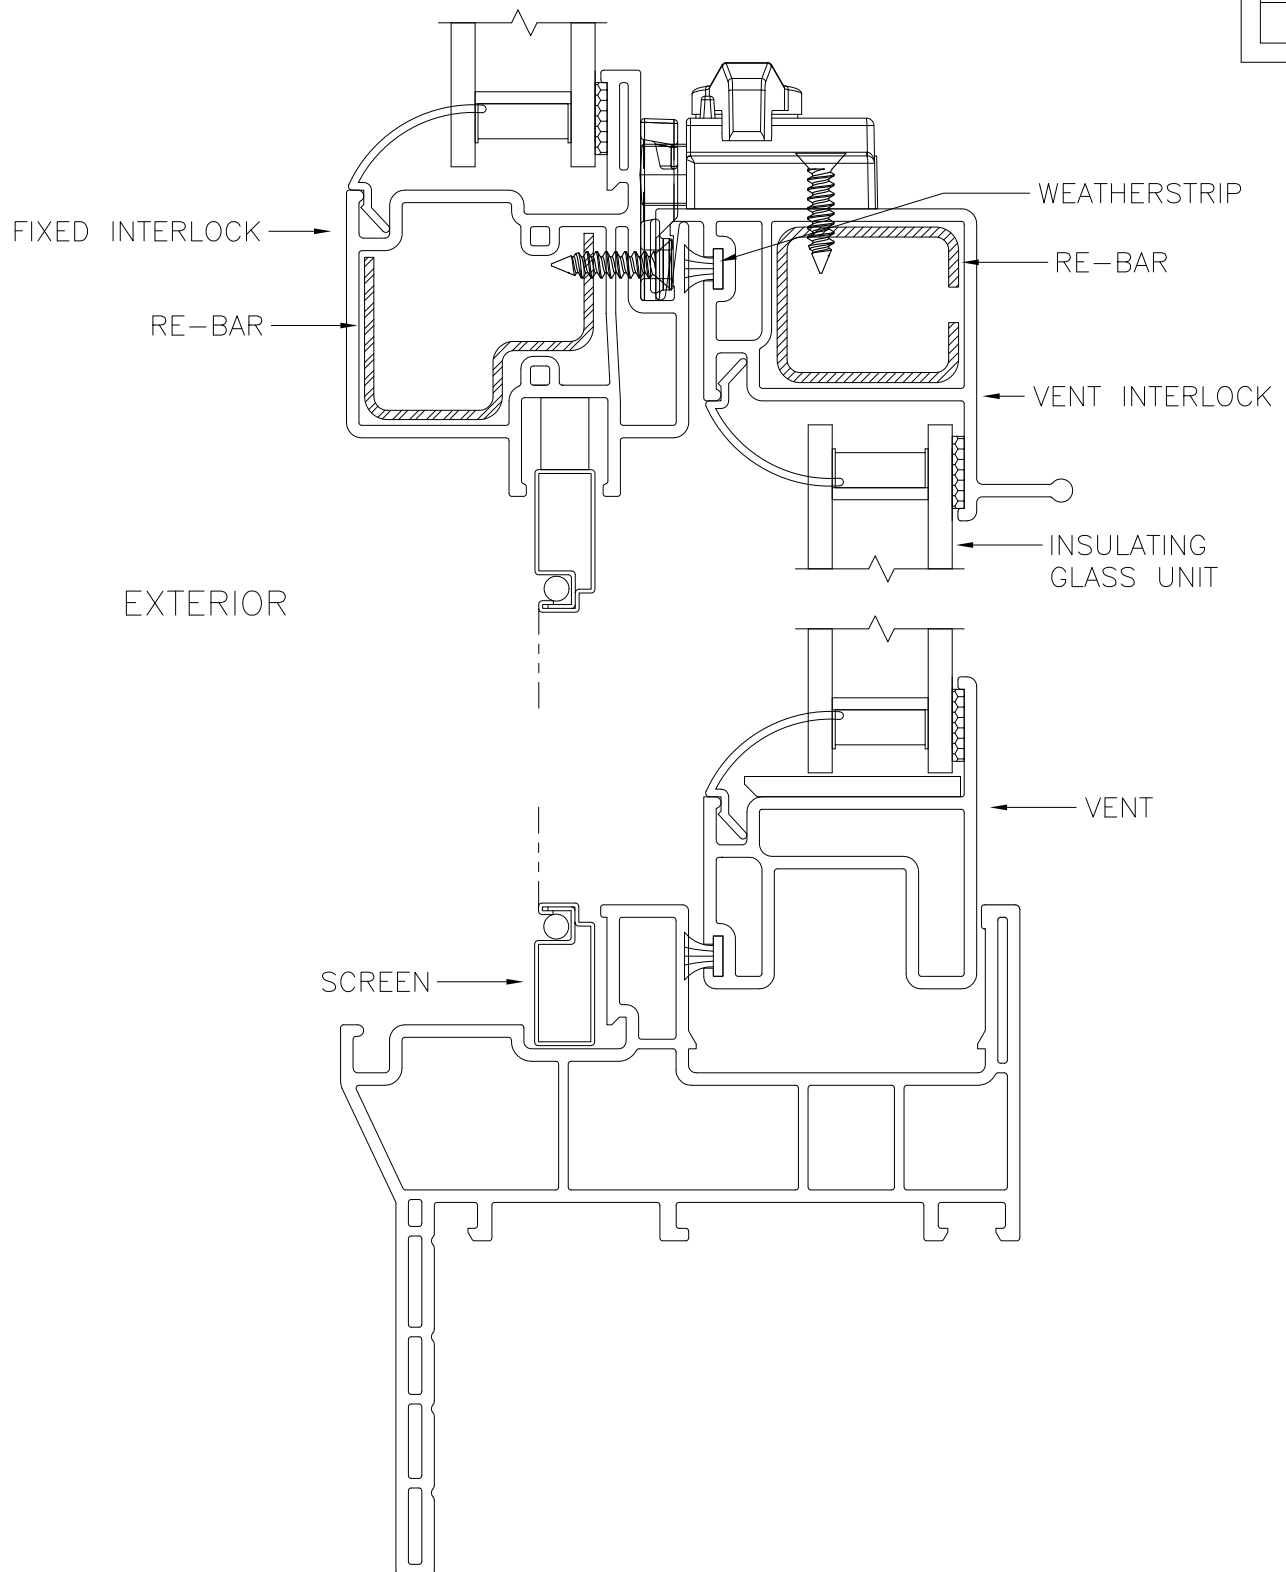


NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung, Flush Fin
Vertical Detail
Scale: Full Scale




Drawing name: 9000SH_1fd.dwg
Date: 3/23/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.



EXTERIOR

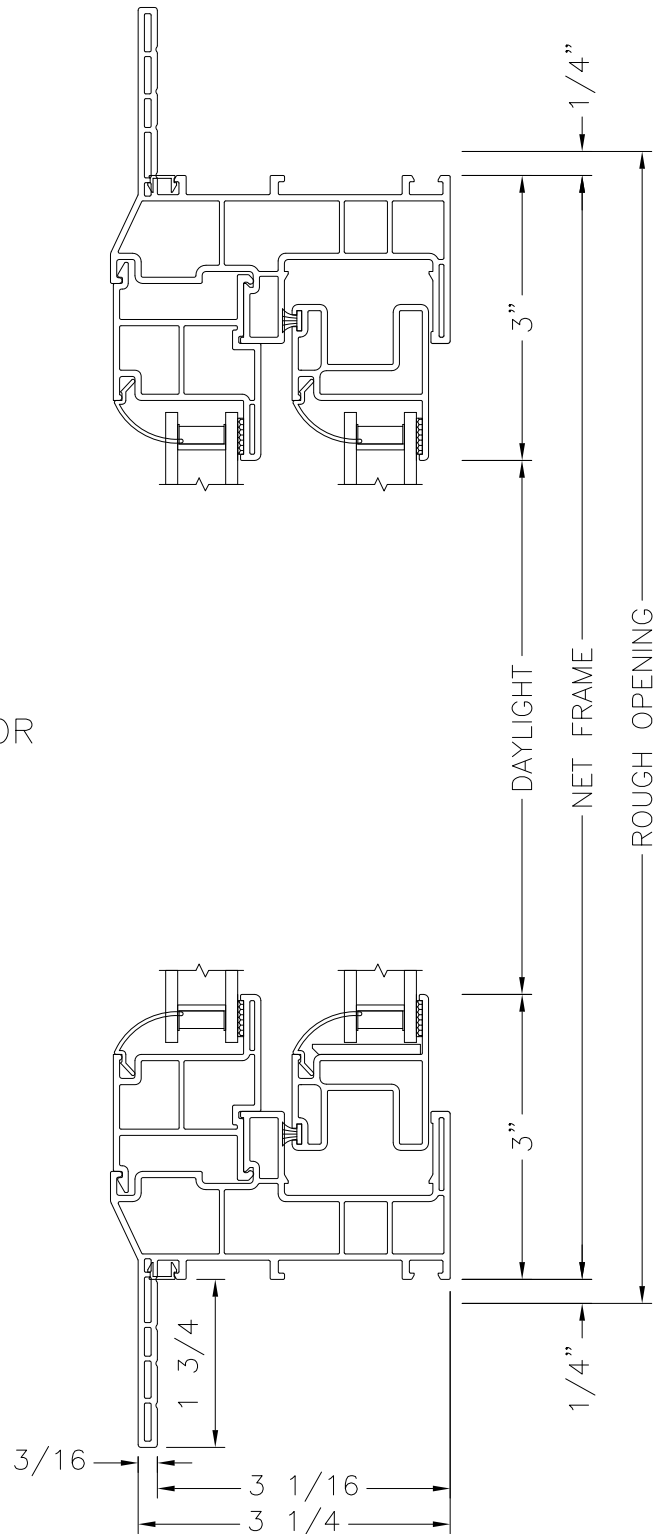


NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION OF PRIME WINDOW SYSTEMS

9000 Series, Single Hung, Flush Fin
Horizontal Section
Scale: 1/2 Scale



Drawing name: 9000SH_3f.dwg
Date: 3/23/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.

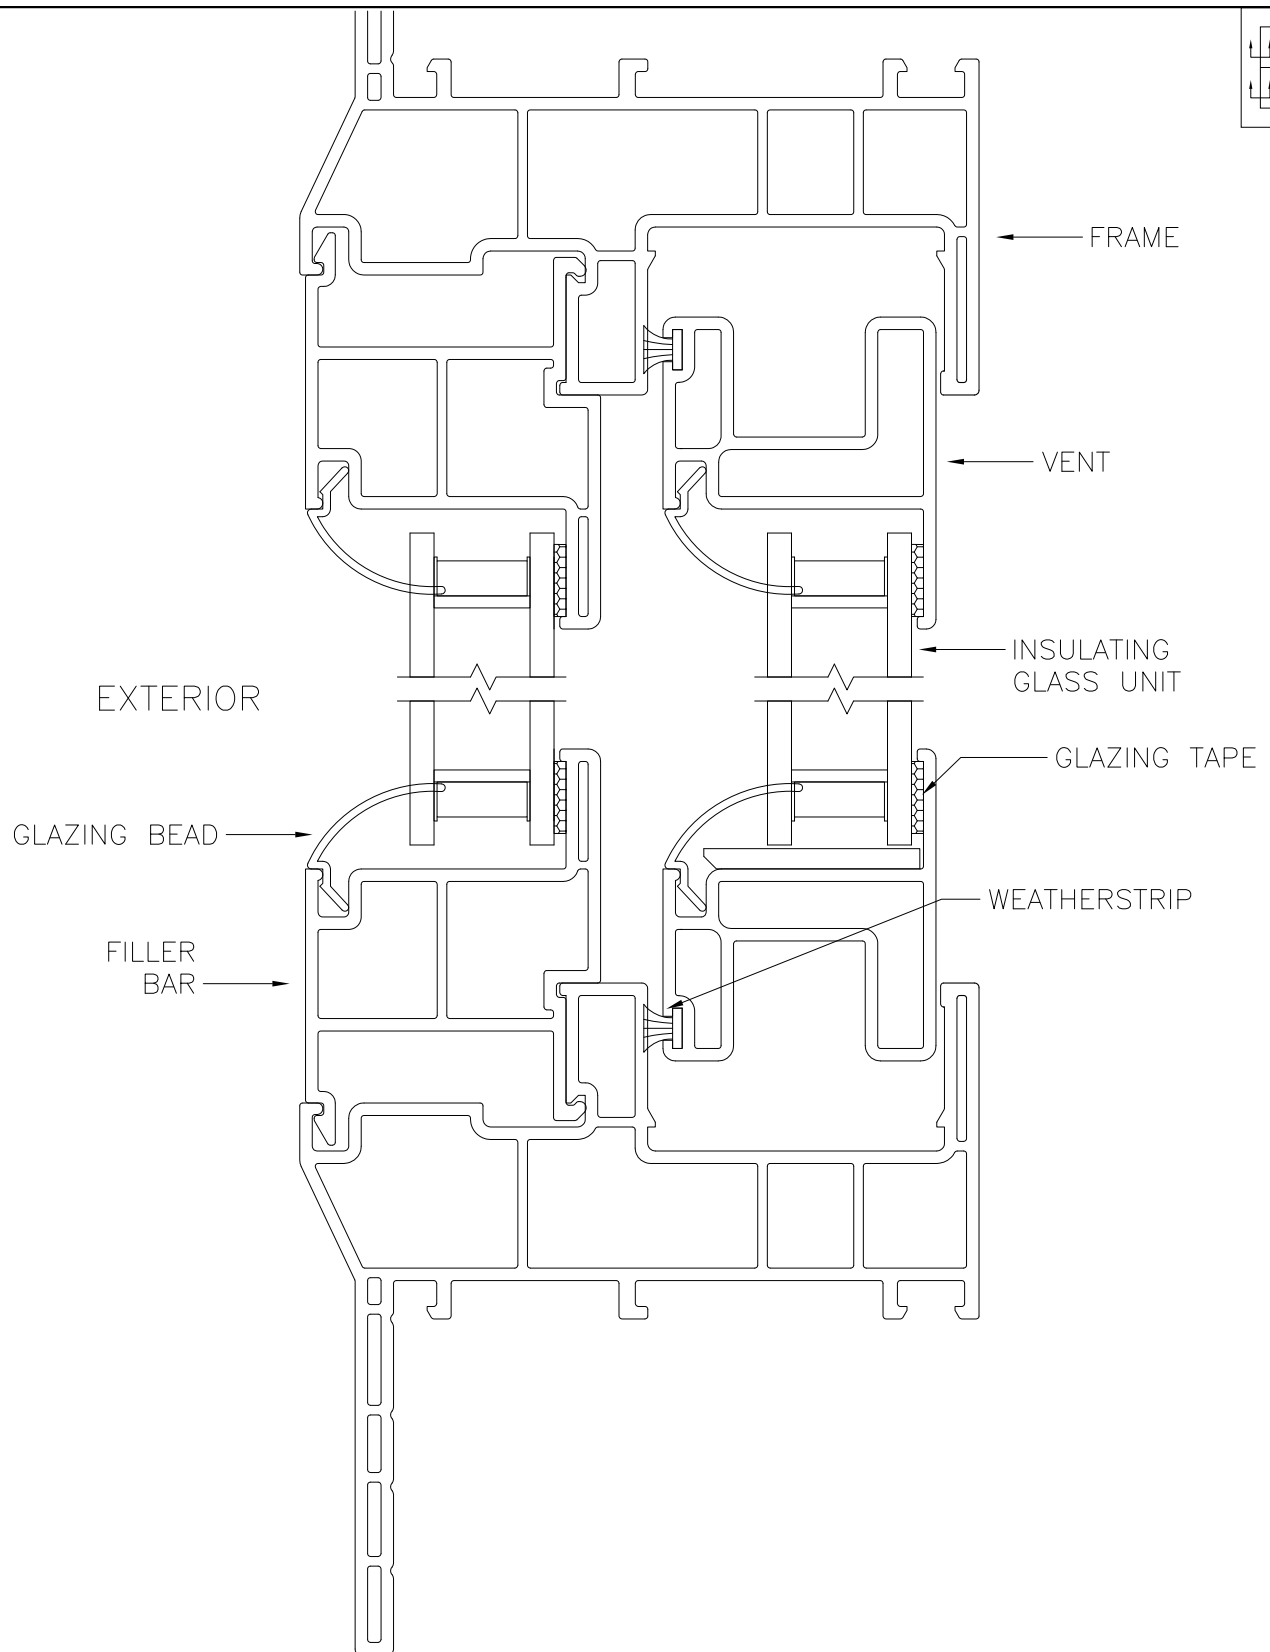

9000 Series, Single Hung, Flush Fin
Horizontal Detail
Scale: Full Scale



Drawing name: 9000SH_3fd.dwg
Date: 3/23/12
Drafted by: CDY

Prime Window Systems, 3400 Tacoma Street, Union Gap, Washington, 98903.